PPC

PREMIER PROTECTIVE COATINGS

CATALOG 2026

THE HIGHEST PERFORMING

Engineered for Strength & Durability



PPC

PPC

THE ULTIMATE PROTECTION

We blend **innovation and reliability** to safeguard your projects. Explore our high-performance coatings designed to elevate aesthetics and ensure durability in every application.

Epoxies	05 - 11
Polyureas	12 - 14
Cementitious	15 - 17
Topcoats	18 - 22
Roofing	23 - 24
Solvents	25 - 27
Waterproofing	28 - 30
Others	31 - 35
Partner Brands	36 - 38

OUR TOP PRODUCTS

★★★★★

Discover our elite selection of high-performance solutions, engineered to deliver unmatched durability, superior chemical resistance, and professional-grade finishes for the most demanding industrial environments.

Epoxy 100

High-performance primer and coating for durable, chemical-resistant industrial floor protection.



Static E300
NT

Specialized ESD-safe coating designed to control static electricity in sensitive environments.



Polyaspartic 85
CLEAR

Rapid-curing, UV-stable topcoat providing **exceptional durability and high-gloss** protective finish.



Krete Urethane
SLURRY SL

Heavy-duty cementitious system engineered for extreme thermal shock and impact resistance.



Silikone
RC 95


Advanced moisture-cure silicone coating for seamless, long-lasting roof waterproofing and protection.



PPC

EPOXIES

Strong, chemical-resistant primers and coatings for industrial and residential floors. Provides durable, high-performance, and long-lasting surface protection.

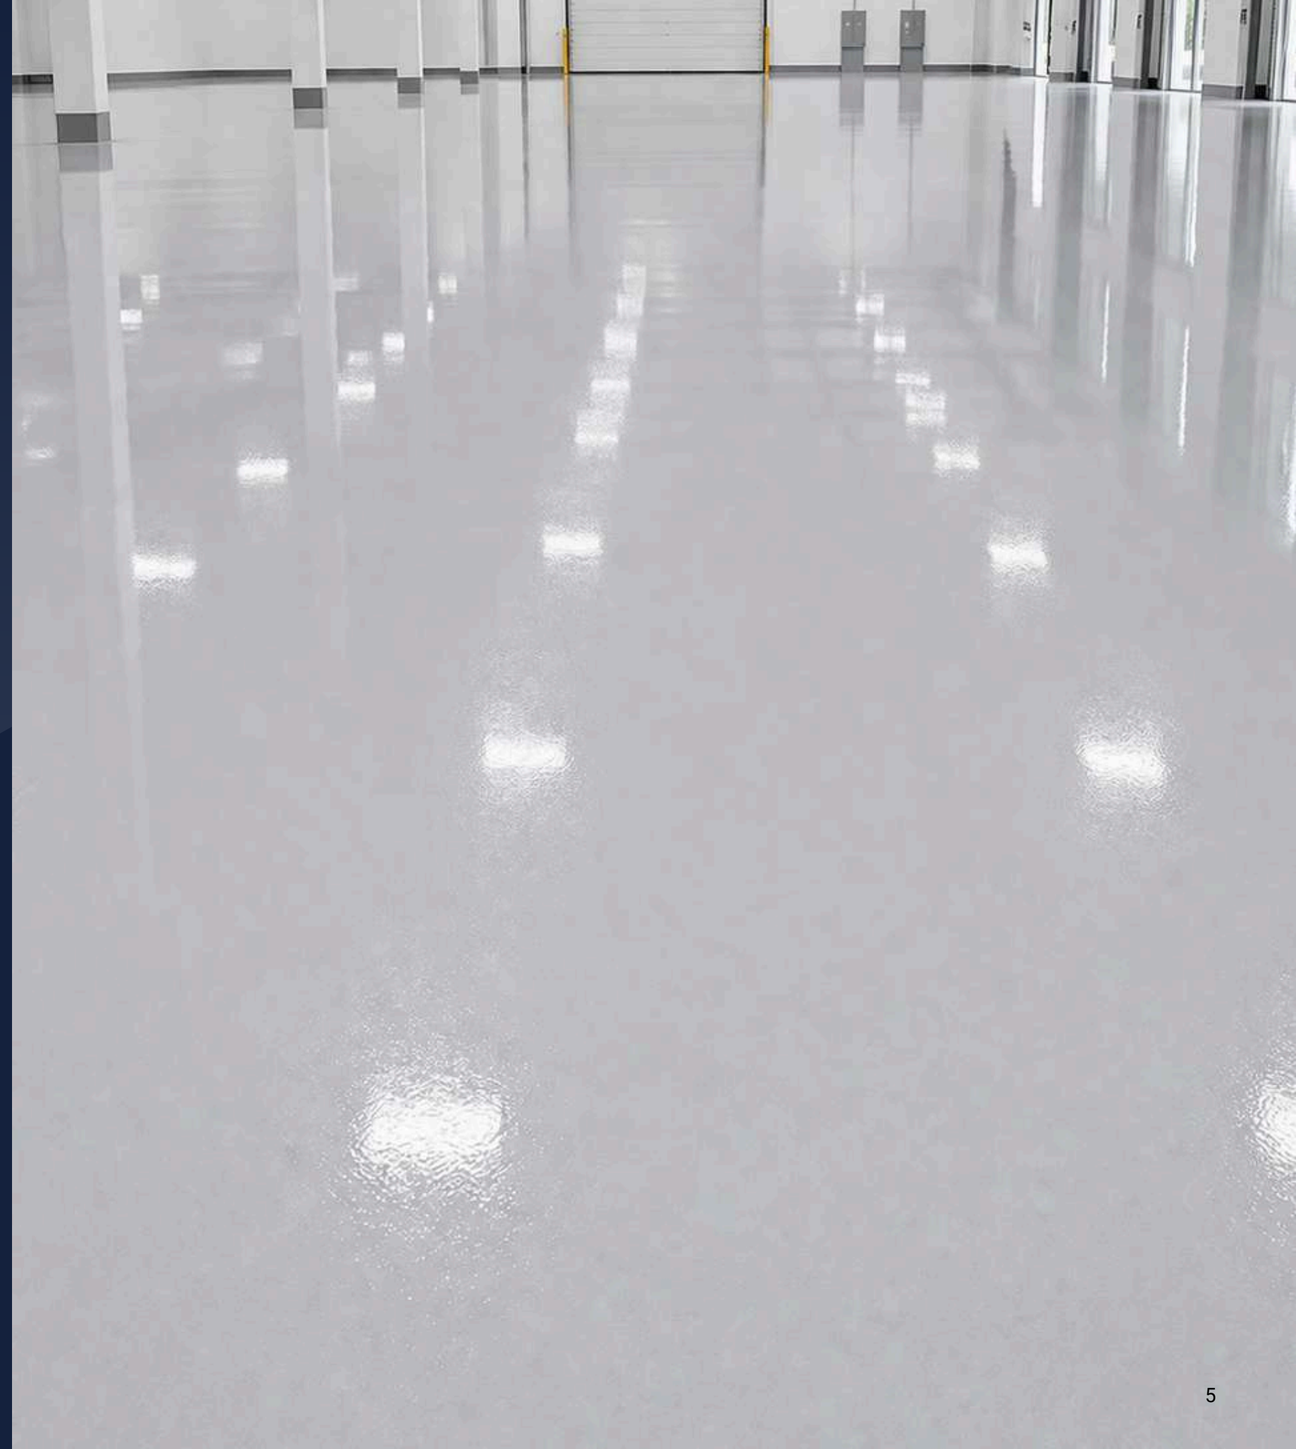



Epoxy 100
CLEAR

DESCRIPTION Solvent-free, UV-resistant epoxy coating providing a **high-gloss finish.** Ideal for durable residential and commercial floor protection and **aesthetic surfaces.**

SCAN TO LEARN MORE

ABOUT THIS PRODUCT

WHERE TO USE

- Distribution centers
- Warehouses
- Stadiums
- Healthcare facilities
- Garages
- Residential living areas

KIT SIZE
3 gal & 15 gal

MIX RATIO
2A : 1B

COVERAGE
133 - 200 sq.ft / gal
8 - 12 WFT

POT LIFE
10 - 15 min

RECOAT WINDOW
8 - 24 hrs

BOND R
>350 psi
ASTM D4541

HARDNESS
85
ASTM D2240

ABRASIVE R
75 - 80 mg
ASTM D4060

ADVANTAGES

- Features superior UV stability
- High gloss
- Chemical resistance
- 100% solids formulation that is environmentally friendly

COLORS

Clear



Epoxy 100
PRE - PIGMENTED

DESCRIPTION The exact same high-performance formula as Epoxy 100 Clear, **but factory-tinted in your choice of colors for consistent results.**

SCAN TO SEE THIS PRODUCT

IN ACTION!

WHERE TO USE

- Distribution centers
- Warehouses
- Stadiums
- Healthcare facilities
- Garages
- Residential living areas

KIT SIZE
3 gal & 15 gal

MIX RATIO
2A : 1B

COVERAGE
133 - 200 sq.ft / gal
8 - 12 WFT

POT LIFE
10 - 15 min

RECOAT WINDOW
8 - 24 hrs

BOND R
>350 psi
ASTM D4541

HARDNESS
85
ASTM D2240

ABRASIVE R
75 - 80 mg
ASTM D4060

ADVANTAGES

- Features superior UV stability
- High gloss
- Chemical resistance
- 100% solids formulation that is environmentally friendly

COLORS

Black **Dark Gray** **Med Gray** **Light Gray** **Tan** **White**



Epoxy Crack
FILLER

DESCRIPTION VOC-free epoxy gel for **structural crack repair.** Non-slump formula ideal for horizontal and vertical surfaces in industrial and commercial environments.

WHERE TO USE

- Manufacturing facilities
- Parking structures
- Retail environments
- Locations requiring structural crack treatment

KIT SIZE
2 gal

MIX RATIO
1A : 1B

COVERAGE
~333 linear ft / liter*

POT LIFE
Extended Working Time

RECOAT WINDOW
24 hrs

ELONGATION
40 - 55%
ASTM D638

VOC CONTENT
VOC free

ADVANTAGES

- High mechanical strength
- Fast 4-hour functional cure
- Excellent thixotropic properties for vertical applications.

COLORS

Clear

** Coverage will depend on width and depth*



MVB
MOISTURE VAPOR BARRIER

DESCRIPTION Low-viscosity epoxy moisture barrier. **Effectively seals concrete floors** against high moisture and pH levels in a single-coat application.

WHERE TO USE

- Laboratories
- Pharmaceutical plants
- Retail stores
- As a blocker underneath various floorings like carpet or wood

KIT SIZE
3 gal & 15 gal

MIX RATIO
2A : 1B

COVERAGE
100 sq.ft / gal
16 WFT

CONTROLLED VAPOR PRESSURE
up to 25lb. / 24 hr. / 1,000 sq ft

POT LIFE
35 - 40 min

RECOAT WINDOW
8 - 24 hrs

BOND STRENGHT
>275 psi
ASTM D4541

ADVANTAGES

- Exceptional concrete adhesion
- Deep slab penetration due to its low viscosity

COLORS

Clear



MVB *Fast Cure*

MOISTURE VAPOR BARRIER

DESCRIPTION Engineered for **fast-turnaround projects,** it seals elevated moisture and high pH concrete floors with a **2 - 24 hour recoat window and foot traffic in 12 hours.**

WHERE TO USE

- Industrial and loading areas.
- Healthcare and scientific facilities.
- Commercial, residential, and institutional spaces.

KIT SIZE
3 gal

MIX RATIO
2A : 1B

COVERAGE
100 sq.ft / gal
16 WFT

CONTROLLED VAPOR PRESSURE
up to 25lb. / 24 hr. / 1,000 sq ft

POT LIFE
15 min

RECOAT WINDOW
2- 24 hrs

BOND STRENGHT
500 psi
ASTM D454

ADVANTAGES

- Fast, one-coat application and curing.
- Superior moisture and vapor control.
- 100% solid, high-gloss finish.

COLORS

Clear



MVB *Super Fast Cure*

MOISTURE VAPOR BARRIER

DESCRIPTION Engineered for **maximum-speed installations.** Treats elevated moisture and high pH concrete floors with foot traffic permitted in as little as **2 to 24 hours. Tack free in 40 minutes, the fastest in the MVB line.**

WHERE TO USE

- Industrial and loading areas.
- Healthcare and scientific facilities.
- Commercial, residential, and institutional spaces.

KIT SIZE
3 gal

MIX RATIO
2A : 1B

COVERAGE
100 sq.ft / gal
16 WFT

CONTROLLED VAPOR PRESSURE
up to 25lb. / 24 hr. / 1,000 sq ft

POT LIFE
5 - 10 min

RECOAT WINDOW
2 - 24 hrs

BOND STRENGHT
500 psi
ASTM D4541

ADVANTAGES

- Fast, one-coat application and curing.
- Superior moisture and vapor control.
- 100% solid, high-gloss finish.

COLORS

Clear



Static Primer

DESCRIPTION Two-component water-based conductive epoxy primer engineered to create an effective ground plane for **advanced electrostatic conductive flooring systems.**

WHERE TO USE

- Electronics assembly
- Cleanrooms
- Data centers
- Aerospace hangars
- Pharmaceutical production facilities requiring reliable static control

KIT SIZE
1.5 gal & 3 gal

MIX RATIO
2A : 1B

COVERAGE
250 - 350 sq.ft / gal

RECOAT WINDOW
8 - 24 hours

VOC CONTENT
126 g/l

POT LIFE
~ 1 hour

ADVANTAGES

- Creates low-resistance ground plane
- Excellent adhesion to concrete
- Water-based low-odor formula
- Meets ANSI S20.20 requirements

COLOR

Flat Black



Static E300 NT

DESCRIPTION High-performance epoxy coating with **Nanowise Technology.** Delivers superior electrostatic conductivity, abrasion resistance, and light reflectivity for sensitive environments.

WHERE TO USE

- Electronics manufacturing
- Cleanrooms
- Laboratories
- Facilities with explosion hazards needing humidity-independent electrostatic discharge protection

ADVANTAGES

- NANOWISE conductive technology
- Outstanding scratch resistance
- High light reflectivity
- Easy maintenance
- Consistent performance across humidity levels

KIT SIZE
1.5 / 3 / 15 gal

MIX RATIO
2A : 1B

COVERAGE
100 - 150 sq.ft / gal

POT LIFE
30 - 45 minutes

RECOAT WINDOW
12 - 24 hrs

VOC CONTENT
31 g/l

COLORS

Adobe, Sand, Buff, Light Gray, Sterling

Concrete Gray, Blue, Black, Slate



Epoxy

WATER BASED

DESCRIPTION Two-component, waterborne epoxy coating system formulated for damp or dry concrete and metal substrates, providing excellent adhesion, corrosion protection, and chemical resistance for commercial and industrial applications.

WHERE TO USE

- Garage Floors
- Food Processing Plants
- Freezers and Cold Storage
- Industrial/Manufacturing Facilities
- Waste Water Treatment Plants

KIT SIZE
3 gal

MIX RATIO
2A : 1B

COVERAGE
300 - 400 sq.ft / gal
4 - 6 mils

VOC CONTENT
29 g/l

ADVANTAGES

- Low VOC & fast dry speed
- Early water resistance & long pot life
- Solvent-free for interior application without harmful odors
- Excellent adhesion on damp or dry surfaces

COLORS

Clear



Novolac

EPOXY 100

DESCRIPTION Advanced 100% solids novolac epoxy providing **exceptional resistance** to harsh chemicals, concentrated acids, and industrial solvents in demanding environments.

WHERE TO USE

- Pharmaceutical and chemical processing zones
- Metal finishing operations
- Laboratories
- Battery charging areas
- Wastewater treatment facilities

ADVANTAGES

- Outstanding resistance to 98% sulfuric acid
- High temperature durability (175°F)
- Low-temperature curing (40°F)
- Excellent concrete adhesion

KIT SIZE
1.5 gal & 15 gal

MIX RATIO
2A : 1B


COVERAGE
133 - 200 sq.ft / gal
8 - 12 WFT

VOC CONTENT
< 1 g/L (Clear)
< 16 g/L (Pigmented)

COLORS

White | Off White | Wheat | Sand | Buff | Detla Fog

Sterling | Concrete Gray | Mocha | Seattle Red | Stale | Black

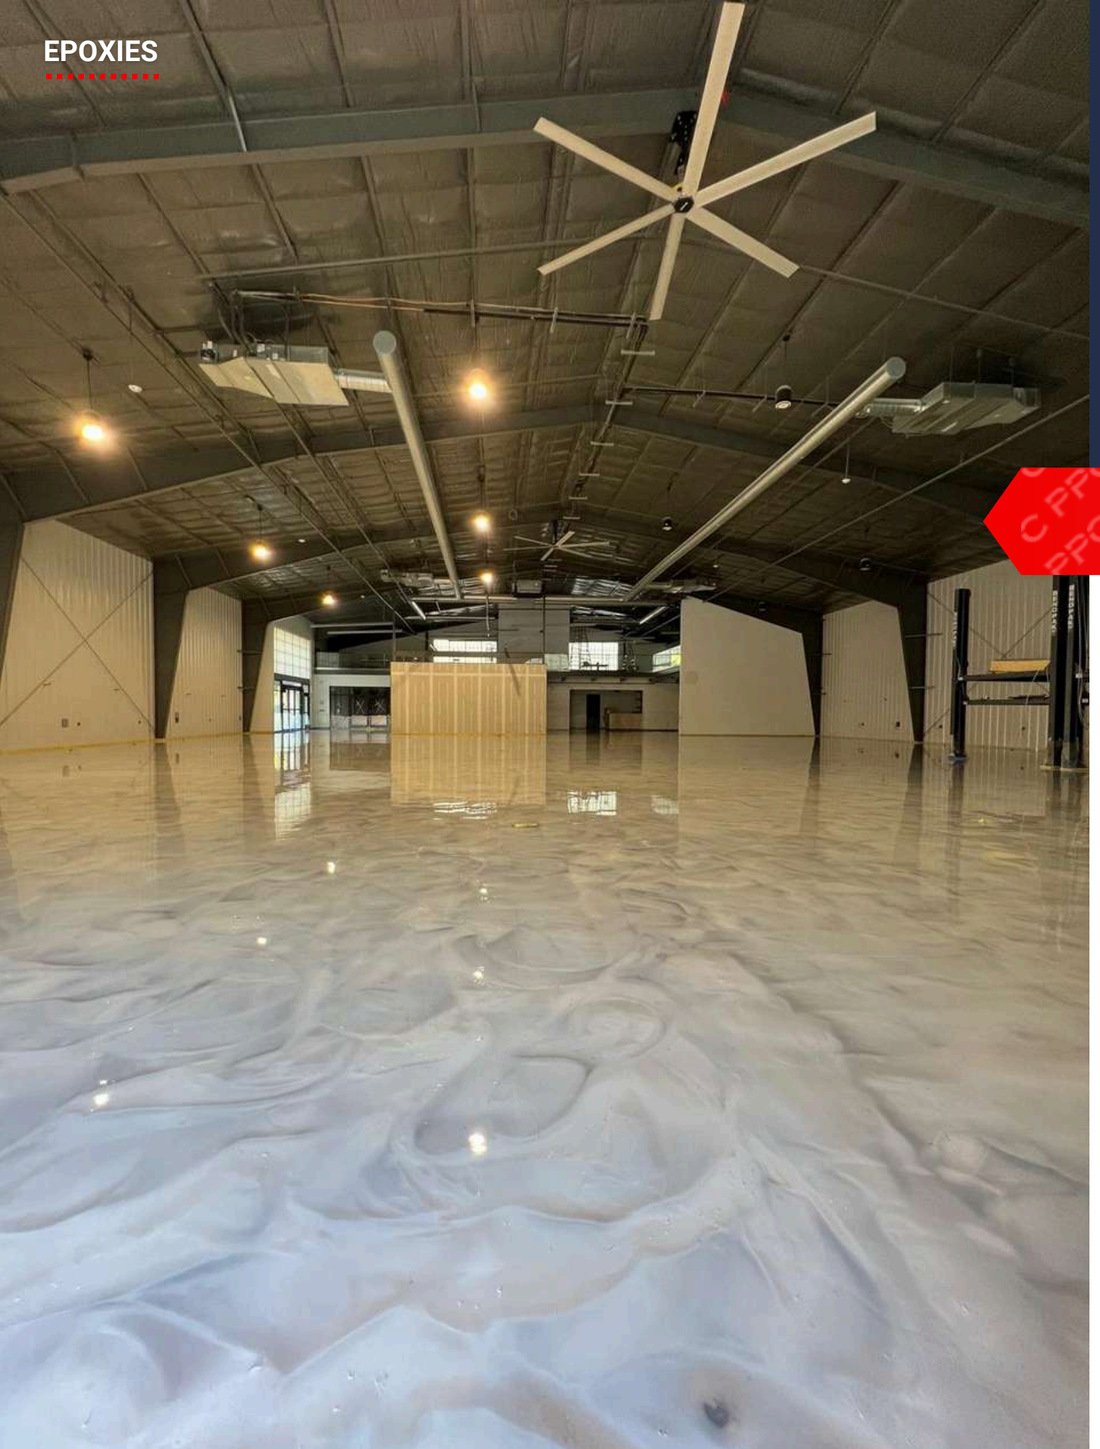



Metallic Flow

DESCRIPTION High-performance 100% solids cycloaliphatic polyamine epoxy system providing superior mechanical properties and aesthetic finishes for decorative metallic floors.

WHERE TO USE

- Distribution centers, manufacturing, and warehouses
- Commercial centers, offices, and retail stores
- Decorative metallic epoxy systems
- Parking garages and residential floors
- Food/beverage, pharmaceutical, and public facilities

KIT SIZE
3 gal

MIX RATIO
2A : 1B

COVERAGE
40 - 200 sq.ft / gal 8 - 50 WTF

ADVANTAGES

- 100% solids self leveling epoxy coating
- 20-minute working time.
- High abrasion resistance
- Low viscosity

COLORS

Clear

PPC

POLYUREAS

Fast-curing flexible membranes and joint fillers. Engineered for rapid return-to-service, waterproofing, and heavy-duty industrial floor repairs.





Hybrid Polyurethane

POLYUREA 421

DESCRIPTION Fast-setting, high-solids **waterproof membrane for heavy-duty surfaces.** Excellent for parking decks and exterior applications across various temperature and humidity conditions.

WHERE TO USE

- Parking decks
- Walkways
- Patios
- Stairways
- Mechanical rooms
- Waterproofing under pavers or asphalt overlay

KIT SIZE
1 gal & 5 gal

MIX RATIO
4A : 1B

COVERAGE
20 - 100 sq.ft / gal

POT LIFE
9 min

HARDNESS
80 ± 3 A
ASTM D2240

ELONGATION
800 ± 100%
ASTM D412

VOC CONTENT
0,49 g/L

ADVANTAGES

- Fast gel time
- Moisture insensitive
- Single-pass high thickness application (250+ mils)
- Excellent weathering resistance

COLOR

Dark Gray **Medium Gray**



Poly Joint 82

DESCRIPTION Rapid-setting, self-leveling polyurea **joint filler for horizontal applications.** Ideal for industrial floors requiring flexibility and fast return to service times.

WHERE TO USE

- Airports
- Industrial facilities
- Parking decks
- Warehouses
- Saw cuts
- Cold storage areas

KIT SIZE
10 gal

MIX RATIO
1A : 1B

GEL TIME
5 - 35 sec
ASTM D2471

COVERAGE
Varies (Joint size)

VISCOSITY
200 - 1200 cps

HARDNESS
80 ± 5
ASTM D2240

ELONGATION
300 ± 50%
ASTM D412

VOC CONTENT
0 g/lL

ADVANTAGES

- Rapid return to service (30-90 min)
- Remains flexible in cold temperatures
- Odorless
- VOC compliant

COLOR

Medium Gray





Polyurea Basecoat 95

DESCRIPTION **High-performance polyurea hybrid basecoat and primer.** Offers outstanding adhesion, long pot life, and VOC compliance for commercial and industrial flooring systems.

WHERE TO USE

- Aircraft hangars
- Automotive shops
- Industrial floors
- Bathrooms, and as a basecoat for decorative aggregate systems.

ADVANTAGES

- Long pot life (35-45 min)
- VOC compliant
- Excellent adhesive properties
- Virtually odorless
- Easy 2:1 mix ratio.

KIT SIZE
3 gal

MIX RATIO
2A : 1B

COVERAGE
200 sq.ft / gal
8 WFT

POT LIFE
20 - 25 min

VISCOSITY
400 - 600 cps

HARDNESS
50 - 55
ASTM D2240

VOC CONTENT
< 50 g/l
ASTM D3960


COLOR

Light Gray **Tan**

PPC

CEMENTITIOUS

High-strength self-leveling solutions for uneven concrete. Creates flat surfaces for flooring installations and demanding structural repairs.

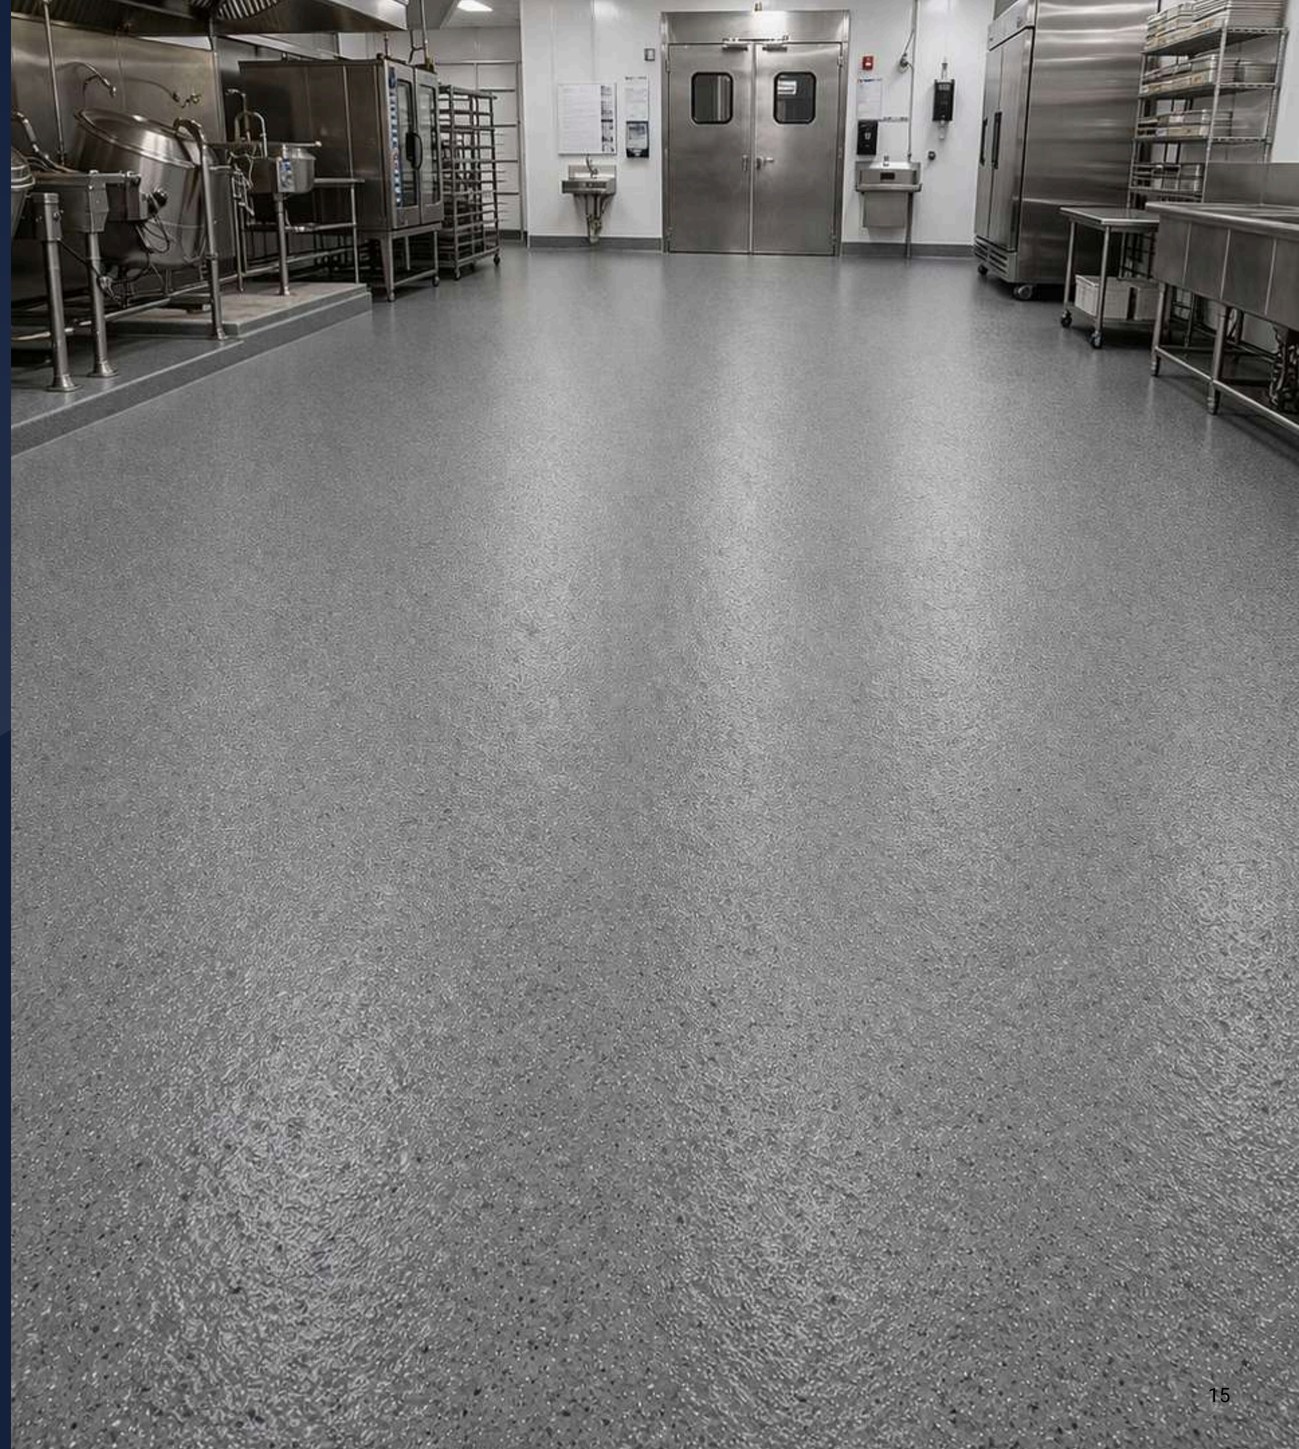



Krete Urethane SLURRY SL



HP Self LEVEL UL

DESCRIPTION **Four-component polyurethane self-leveling system.** Provides a smooth, matte, antimicrobial finish with high fluid efficiency for rapid industrial floor installations.

SCAN TO LEARN MORE

ABOUT THIS PRODUCT

WHERE TO USE

- Food and beverage facilities
- Commercial kitchens
- Pharmaceutical plants
- Warehouses
- Laboratories
- Refrigerated storage areas

KIT SIZE
44 lb

MIX RATIO
Full Kit

COVERAGE
23 - 35 sq.ft / kit

WORKING TIME
23 - 27 min

APPEARANCE
Smooth Matte

BOND STRENGHT
> 400 psi
ASTM C4541

HARDNESS
84 - 85
ASTM D2240

ABRASSION R
25 mg
ASTM D4060

ADVANTAGES

- High impact and abrasion resistance
- Rapid cure development
- Seamless hygienic finish
- Exceptional thermal and chemical resistance

COLORS

Cream | Green | Yellow | Red | Gray | Light Gray

DESCRIPTION **Fast-setting, polymer-enhanced cementitious self-leveling underlayment.** Creates perfectly flat surfaces for various flooring installations or repairing uneven concrete substrates.

WHERE TO USE

- Residential floors
- Retail stores
- Restaurants
- Offices
- High-traffic commercial areas
- Hospitals
- Schools

KIT SIZE
50 lb

MIX RATIO
Full Kit

WORKING TIME
10 - 18 min

HARDENING TIME
4 - 6 hrs

APPEARANCE
Consistent Sand Color

ABRASSION R
.037"
ASTM C779

ADVANTAGES

- Quick curing and turnaround
- High compressive strength
- Fire and Smoke Class A certified
- Compatible with multiple floor finishes

COLORS

Sand



Krete Urethane

TOPCOAT



DESCRIPTION **Four-component polyurethane coating** for use with urethane slurry systems. Provides an attractive, smooth matte finish with excellent chemical and moisture resistance.

WHERE TO USE

- Polyurethane floors and coving requiring a sealed
- Slip-resistant profile in extreme industrial environments.

KIT SIZE
12 lb

MIX RATIO
Full Kit

COVERAGE
100 - 200 sq.ft / kit

APPEARANCE
Smooth Matte

HARDNESS
84 - 85
ASTM C2240

ABRASSION R
25 mg
ASTM D4060

ADVANTAGES

- High impact resistance
- Rapid cure development
- Seamless hygienic finish
- Long-term durability in heavy-duty settings

COLORS

Cream | Green | Yellow | Red | Gray | Light Gray

PPC

TOPCOATS

Final protective layers enhancing aesthetics and UV stability. Durable finishes available in gloss, matte, or satin for surfaces.





Polyaspartic 85

CLEAR

DESCRIPTION **Two-component polyaspartic coating for colored basecoats or clear topcoats.** Offers rapid curing, UV stability, and a flawless, high-performance aesthetic finish.

WHERE TO USE

- Pharmaceutical plants
- Healthcare facilities
- Research laboratories
- Retail complexes
- Residential garage floors

KIT SIZE
2 gal & 10 gal

MIX RATIO
1A : 1B

COVERAGE
100 - 200 / gal
8 - 10 WFT

POT LIFE
10 - 15 min

RECOAT WINDOW
6 - 24 hrs

BOND STRENGHT
350 psi
ASTM D4541

HARDNESS
> 65
ASTM D2240

ABRASSION R
58 mg loss
ASTM D4060

ADVANTAGES

- Rapid one-day installation
- Full UV stability
- Superior chemical resistance
- Excellent mechanical properties with minimal maintenance

COLOR

Clear



Alipathic

URETHANE 5600

DESCRIPTION Two-component, quick-setting, ultra-high-solids hybrid aliphatic elastomeric topcoat **for interior and exterior concrete, plywood, and metal surfaces.**

WHERE TO USE

- High-traffic vehicular decks
- Ramps
- Pedestrian walkways
- Balconies
- Mechanical equipment rooms
- Animal care areas or kennels

KIT SIZE
4.4 gal

MIX RATIO
10A : 1B

COVERAGE
100 sq.ft / gal

WORKING TIME
10 - 30 min

HARDNESS
85 ± 5
ASTM D2240

ELONGATION
450 ± 10%
ASTM D2240

VOC CONTENT
< 0.5 lbs/gal

ADVANTAGES

- Rapid curing
- Ultra-high-solids formulation
- Moisture-tolerant
- Suitable for application in low temperatures down to 20°F

COLOR

Medium Gray



WATER BASED

Polyurethane

(Clear)

DESCRIPTION High-performance water-based coating for commercial floors. **Enhances wood or epoxy beauty** without yellowing while providing supreme air-dry resistance and protection.

WHERE TO USE

- Gymnasiums
- Schools
- Restaurants
- Retail stores
- Hotels
- Residential living spaces

KIT SIZE
1 gal

MIX RATIO
Single Component

COVERAGE
600 sq.ft / gal

POT LIFE
60 - 90 min

RECOAT WINDOW
3 - 4 hrs

APPEARANCE
Matte/Satin/Gloss

VOC CONTENT
272 g/L

ADVANTAGES

- Supreme abrasion resistance
- Non-yellowing formula
- Easy installation
- Low VOC content
- Available in multiple finishes

COLOR

Clear



Polyaspartic 70

DESCRIPTION High-gloss polyaspartic polyurea utilizing **innovative nanotechnology.** Delivers superior bonding, UV stability, and abrasion resistance for various protective concrete surface applications.

WHERE TO USE

- Decorative concrete
- Sun-saturated areas
- Industrial projects requiring fast return-to-service times

KIT SIZE
2 gal

MIX RATIO
1A : 1B

COVERAGE
100 - 350 sq.ft / gal

POT LIFE
20 - 30 min

RECOAT WINDOW
2 - 18 hrs

APPEARANCE
High Gloss

VOC CONTENT
< 400 g/L

ADVANTAGES

- Easy roller application
- Hot tire pick-up resistance
- Non-yellowing high gloss finish
- Excellent penetration

COLOR

Medium Gray



Polyaspartic 85 PRO

DESCRIPTION High-performance, two-component polyaspartic coating system designed for rapid turnaround and fast curing. Delivers superior mechanical, chemical, and UV resistance as a colored basecoat or crystal-clear topcoat

WHERE TO USE

- Pharmaceutical
- Food and beverage
- Commercial and retail
- Community spaces
- Vehicle repair shops

KIT SIZE
2 gal

MIX RATIO
1A : 1B

COVERAGE
175 - 200 sq.ft / gal

RECOAT WINDOW
6 - 14 hrs

APPEARANCE
High Sheen

POT LIFE
10 -15 min

ADVANTAGES

- Hot tire pick-up & abrasion resistance
- Multi-coat application in a single day
- Outstanding UV & color stability
- Essentially odorless & self-priming

COLOR

Clear



Polyaspartic 100 Slow Cure

DESCRIPTION Two-component, 100% solids aliphatic polyaspartic coating formulated with an extended working time as a UV-stable flooring topcoat. Delivers superior resistance to chemicals, solvents, and UV exposure.

WHERE TO USE

- Pharmaceutical and healthcare
- Processing plants
- Commercial, retail & corporate
- Kitchen and restrooms
- Prisons and correctional

KIT SIZE
2 gal & 10 gal

MIX RATIO
1A : 1B

COVERAGE
175 - 200 sq.ft / gal

RECOAT WINDOW
6 - 12 hrs

APPEARANCE
High Gloss

POT LIFE
10 - 15 min

ADVANTAGES

- UV-stable, non-yellowing finish
- Chemical & abrasion resistance
- Virtually odor-free formula
- Excellent substrate adhesion

COLOR

Clear



Aliphatic Urethane

TOPCOAT 60%



DESCRIPTION High-performance, two-component, low-VOC aliphatic polyurethane topcoat engineered for exceptional durability. Delivers superior abrasion, chemical, hot tire, and UV resistance for commercial and industrial concrete floors.

WHERE TO USE

- Aircraft hangar floors
- Pharmaceutical and healthcare
- Warehouses & manufacturing
- Retail, restaurants & lobbies

KIT SIZE
3 gal

MIX RATIO
2A : 1B

COVERAGE
250 - 350 sq.ft / gal

POT LIFE
20 - 30 min

RECOAT WINDOW
10 - 24 hrs

APPEARANCE
High Sheen

VOC CONTENT
< 250 g/L

ADVANTAGES

- UV-stable, high-gloss retention
- Hot tire pickup resistance
- Superior chemical & abrasion resistance
- Long pot life & low VOC

COLOR

Clear

PPC

ROOFING

Seamless silicone coatings for roof waterproofing and UV stability. Energy-saving reflective solutions protecting against leaks and severe weather.





Silikone
RC 95

DESCRIPTION High-solid, single-component moisture-cure silicone coating for low-slope roofs. Provides seamless waterproofing, UV stability, and superior weather resistance.

WHERE TO USE

- Maintenance of low-slope roofs
- Concrete
- Metal
- Masonry surfaces
- Vertical walls
- Single-ply membranes (TPO, PVC, EPDM).

KIT SIZE
5 gal

MIX RATIO
Single Component

COVERAGE
1.5 gal / 100 sq.ft

VOC CONTENT
< 50 g/L

ADVANTAGES

- Highly elastomeric and UV stable
- Seamless water seal protection
- Energy-saving reflective coating
- High-temperature resistant formula.

COLORS

White Gray Tan



RC WB
Epoxy Primer

DESCRIPTION Two-component water-based epoxy primer and masonry block filler providing strong adhesion on roofing, metal, plastic, and masonry surfaces.

WHERE TO USE

- Roofing surfaces before topcoat application
- Galvanized metal, PVC & modified bitumen
- Porous concrete, masonry & wood

KIT SIZE
10 gal

MIX RATIO
1A : 1B

COVERAGE
100 sq.ft / gal

POT LIFE
20 - 30 min

ADVANTAGES

- Water-based, multi-purpose primer & block filler
- Improves topcoat bonding on difficult surfaces
- Multiple certifications including UL, FM & NSF

COLORS

White Blue

PPC

SOLVENTS

High-purity liquids for thinning, degreasing, and cleaning tools. Essential for surface preparation and maintaining professional application equipment.







Acetone

5 gal / 1 gal

DESCRIPTION Fast-evaporating, high-strength solvent for **cleaning tools and removing resins.** Essential for surface preparation and equipment maintenance.

WHERE TO USE

- Tool cleaning
- Thinning certain resins
- Surface degreasing
- Removing adhesives or uncured epoxy

KIT SIZE
1 gal & 5 gal

MIX RATIO
Single Component

DENSITY
~ 0.79 g/ml

FLASH POINT
-4.0 °F (-20 °C)

BOILING POINT
132.8 °F (56 °C)

EVAPORATION RATE
Very Fast

ADVANTAGES

- Rapid evaporation
- High solvency power
- Effective on tough residues
- Leaves no oily film





Xylene

5 gal / 1 gal

DESCRIPTION **Powerful industrial thinner** for specialty coatings and heavy-duty tool cleaning. Dissolves resins, adhesives, and oily contaminants effectively.

WHERE TO USE

- Thinning oil-based paints and varnishes
- Cleaning spray equipment
- Dissolving synthetic resins or rubber

KIT SIZE
1 gal & 5 gal

MIX RATIO
Single Component

DENSITY
~ 0.90 g/ml


FLASH POINT
85 °F (28 °C)

BOILING POINT
280 °F (138 °C)

EVAPORATION RATE
Fast

ADVANTAGES

- Slow evaporation rate for better flow
- Excellent resin solubility
- High cleaning efficiency for industrial gear

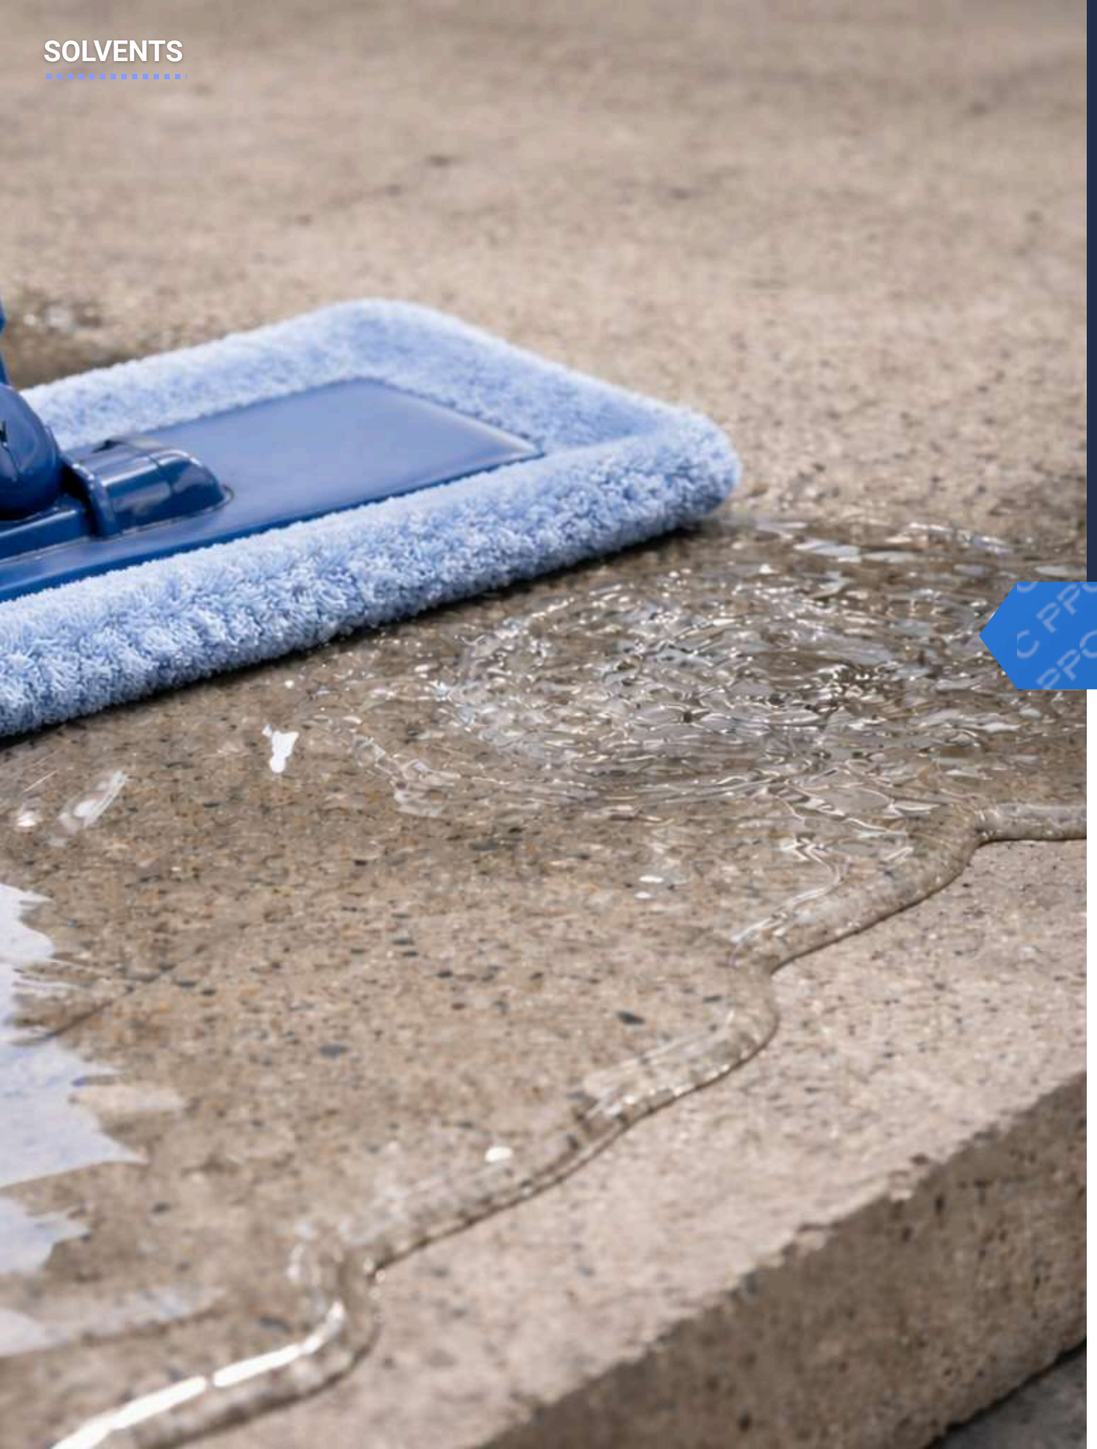



Denatured Alcohol

5 gal / 1 gal

DESCRIPTION **Effective solvent blend** for thinning and surface cleaning. Removes grease and oils without leaving significant residue on substrates.

WHERE TO USE

- Cleaning glass, metal, and plastic surfaces
- Thinning specific coatings
- As a fuel for alcohol burners.

ADVANTAGES

- High purity
- Versatile cleaning agent
- Fast drying
- Effective at removing moisture from surfaces

KIT SIZE
1 gal & 5 gal

MIX RATIO
Single Component

DENSITY
~ 0.8 g/ml

FLASH POINT
55 °F (13 °C)

BOILING POINT
200 °F (85 °C)

EVAPORATION RATE
Medium

PPC

WATERPROOFING

High-performance moisture barriers and sealants for concrete and masonry floors. Prevents water infiltration and safeguards structural integrity against dampness and hydrostatic pressure.







OS Polyurethane
Membrane

DESCRIPTION Seamless, solvent-free dual-component polyurethane membrane for heavy-duty waterproofing on concrete, metal, and plywood — interior and exterior applications.

WHERE TO USE

- Vehicular & pedestrian traffic decks
- Waterproofing under pavers & asphalt
- Interior & exterior concrete surfaces

KIT SIZE
5 gal

MIX RATIO
4A : 1B

COVERAGE
1520 sq.ft / gal

POT LIFE
9 min

ELONGATION
800 ± 100%
AS D412

HARDNESS
90 ± 3A
AS D2240

ADVANTAGES

- 200 mils single-pass application
- Fast cure & low temperature performance
- Seamless, flexible & VOC compliant

COLORS

Dark Gray **Med Gray**



WC Membrane
Sealant

DESCRIPTION Rapid-setting, moisture-reactive single-component elastic membrane for interior and exterior sealing, waterproofing, and roofing applications on multiple substrates.

WHERE TO USE

- Roofing & subsurface waterproofing systems
- Below-grade & planter box applications
- Expansion joints, spall repair & surface prep

KIT SIZE
5 gal

MIX RATIO
Single Component

ELONGATION
300 - 400% ±50 psi

HARDNESS
30 ± 5
AS D2240

ADVANTAGES

- Single-component, self-priming & odor-neutral
- High-build, rapid-setting & non-gassing
- 100% solids with ASTM C-920 certification

COLORS

Gray



WC Membrane GC

DESCRIPTION Seamless, single-component bitumen-modified urethane polyurea membrane for vertical and horizontal waterproofing on concrete, plywood, and green roofs.

WHERE TO USE

- Subsurface & below-grade waterproofing
- Roofing, green roofs & planters
- Concrete, plywood & foundation surfaces

KIT SIZE
5 gal

MIX RATIO
Single Component

HARDNESS
25 ± 5
ASTM D2240

ADVANTAGES

- Single-component, no heating, fast curing
- Any thickness in one application
- Highly flexible with 650% elongation

COLORS

Black



Base Membrane
921 WT

DESCRIPTION Two-component, NSF-approved aromatic polyurethane membrane for durable waterproofing on tanks, ponds, bridges, and potable water containment.

WHERE TO USE

- Tank, pond & containment liners
- Potable water containment & storage
- Bridges, roofing & waterproofing

KIT SIZE
4.5 gal

MIX RATIO
1A : 9B

COVERAGE
50 sq.ft / gal 32 WFT

HARDNESS
60 ± 5
ASTM D2240

ABRASSION R
7.2 mg loss
ASTM D4060

ADVANTAGES

- NSF/ANSI 61 approved for potable water
- Seamless, impervious & crack-bridging membrane
- 450% elongation with full recovery


COLORS

Black

PPC

OTHERS

Specialized solutions including densifiers, ESD coatings, and chemical-resistant novolacs. Advanced protection for sensitive environments and industrial requirements.

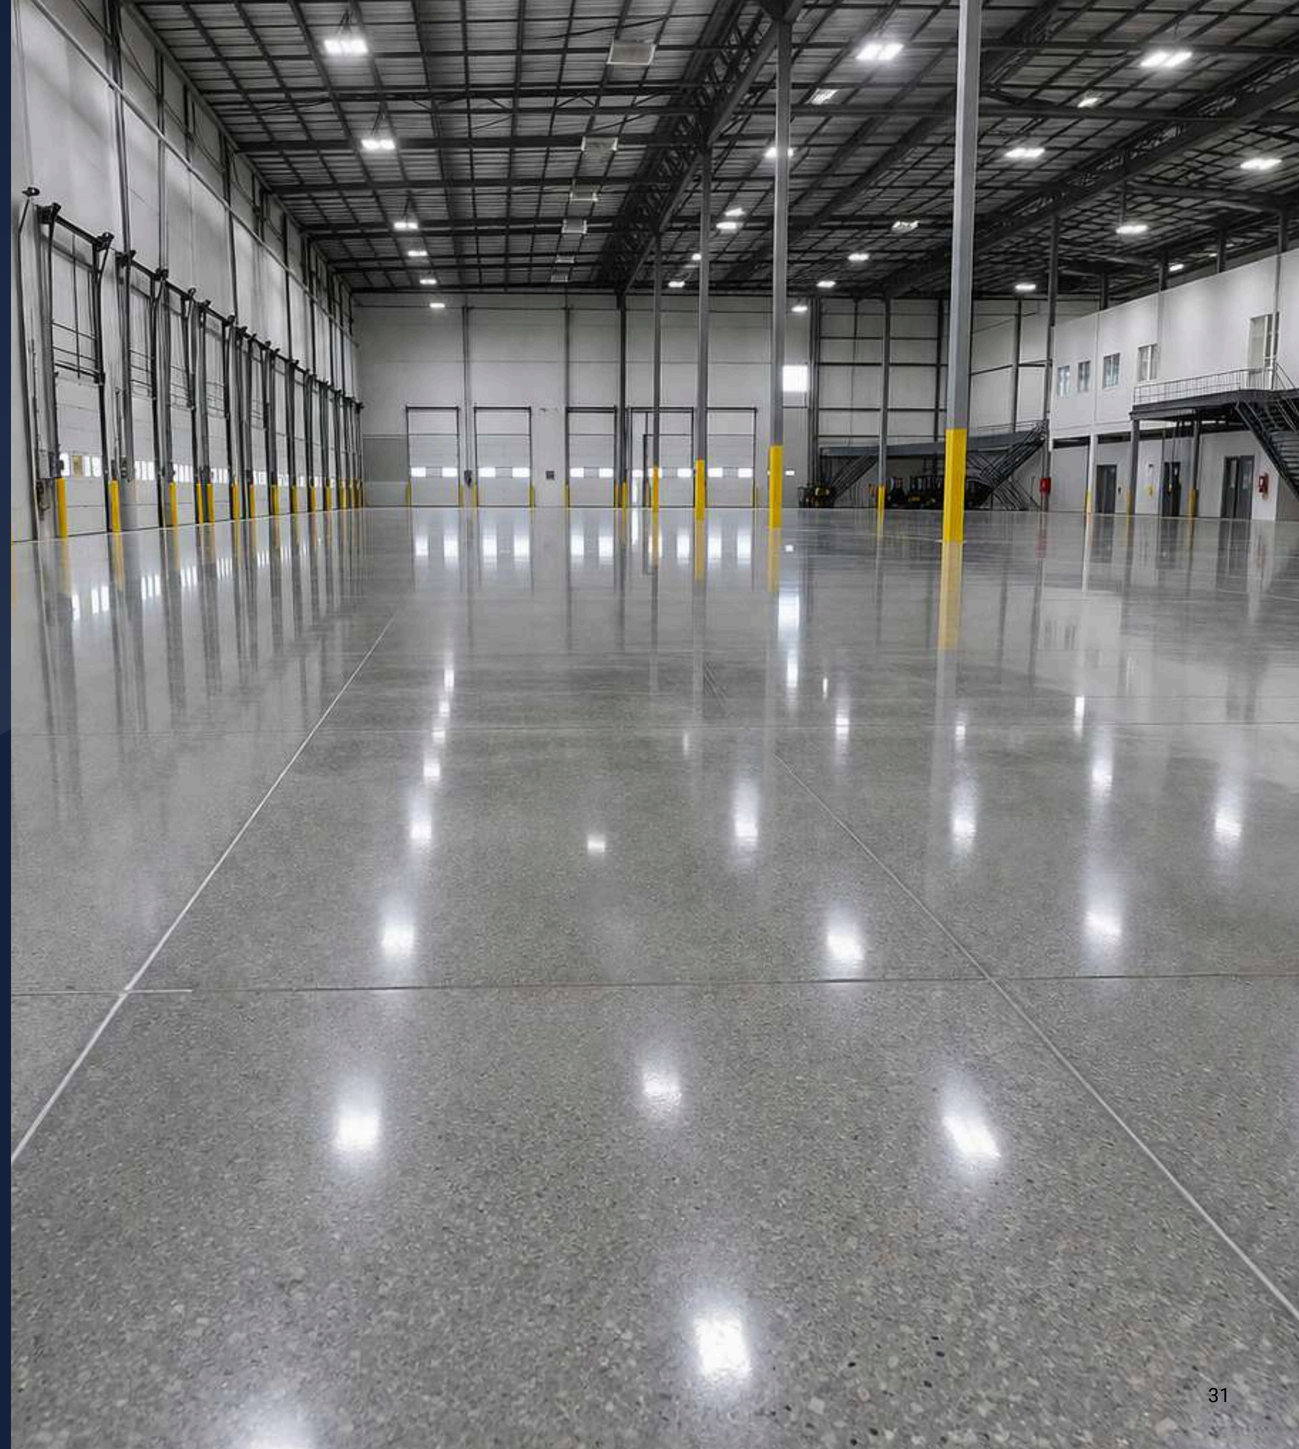



Shield LS

DENSIFIER

DESCRIPTION Zero VOC penetrating **densifier that seals, hardens, and dustproofs concrete.** Provides a durable, water-repellent finish without needing surface agitation.

WHERE TO USE

- New "green" or existing concrete
- Interior and exterior
- Horizontal or vertical surfaces including warehouses and commercial floors

KIT SIZE
1 gal & 5 gal

MIX RATIO
Single Component

COVERAGE
400 - 450 sq.ft / gal

DRY TIME
30 - 60 min

APPEARANCE
Clear (Invisible)

VOC CONTENT
0 g/L

ADVANTAGES

- 20-year performance warranty
- Eliminates concrete dusting
- UV stable (won't yellow)
- Requires no scrubbing or rinsing during application

COLORS

Clear



Shield SG

GUARD

DESCRIPTION **High-performance sealer and polishing guard** providing etch resistance and high sheen. Protects decorative concrete and masonry against chemicals and oil.

WHERE TO USE

- Polished concrete
- Pavers
- Terrazzo
- Countertops and masonry
- Suitable for high-traffic interior and exterior areas requiring stain protection

KIT SIZE
1 gal & 5 gal

MIX RATIO
Single Component

COVERAGE
250 sq.ft / gal

DRY TIME
4 - 8 hours

APPEARANCE
Clear / High Sheen

VOC CONTENT
< 5 g/L

ADVANTAGES

- Superior chemical and oil resistance
- Easy spray-on application
- No burnishing required
- Provides long-lasting durability for five years

COLORS

Clear



Aqua Acrylcoat 25

DESCRIPTION Breathable, water-based acrylic sealer **for curing and sealing concrete.** Provides a medium gloss finish with outstanding alkali and efflorescence resistance.

WHERE TO USE

- Patios
- Sidewalks
- Garage floors
- Driveways
- Most new interior or exterior masonry surfaces

KIT SIZE
5 gal

MIX RATIO
Single Component

COVERAGE
250 - 350 sq.ft / gal

RECOAT WINDOW
4 - 24 hrs

APPEARANCE
Medium Gloss

VOC CONTENT
< 350 g/L

ADVANTAGES

- Low odor
- Non-yellowing
- Early water resistance
- Self-crosslinking technology for superior film formation

COLOR

Clear



Acrylcoat 30

DESCRIPTION UV-resistant acrylic **copolymer sealer for all concrete types.** Offers a high-gloss finish and protection against rain, stains, and freezing temperatures.

WHERE TO USE

- Stamped or acid-stained concrete
- Patios
- Exposed aggregate
- Surfaces needing enhanced water damage resistance

KIT SIZE
5 gal

MIX RATIO
Single Component

COVERAGE
300 - 350 sq.ft / gal

RECOAT WINDOW
4 - 24 hrs

APPEARANCE
High Gloss

VOC CONTENT
< 700 g/L

ADVANTAGES

- Improved pollutant resistance
- Prevents loose pebbles in aggregate
- UV stable
- Provides a durable aesthetic

COLOR

Clear



High Wear Additive

DESCRIPTION 220-grit white aluminum oxide additive for urethane, polyaspartic, and epoxy coating systems. Enhances durability, abrasion resistance, and surface traction without compromising protective properties

WHERE TO USE

- Industrial warehouses
- Automotive service centers
- Kitchens and cafeterias
- Research facilities
- High-traffic commercial

KIT SIZE
5 gal

MIX RATIO
Single Component

APPEARANCE
white - slightly cloudy when applied

COVERAGE
250 - 350 sq.ft / gal

ADVANTAGES

- Superior abrasion and wear resistance
- Improved surface texture and traction
- Durable, satin-like finish
- Compatible with epoxy, urethane and polyaspartic systems

COLOR

White-slightly cloudy



Epoxy Accelerator

DESCRIPTION Effective solvent blend for thinning and surface cleaning. Removes grease and oils without leaving significant residue on substrates.

WHERE TO USE

- Cleaning glass
- Metal, and plastic surfaces
- Thinning specific coatings
- Fuel for alcohol burners.

KIT SIZE
8 oz

MIX RATIO
Single Component

RECOAT WINDOW
6 - 12 hours

DRY TIME
4 - 5 hours

ADVANTAGES

- High purity
- Versatile cleaning agent
- Fast drying
- Effective at removing moisture from surfaces

COLOR

Amber

Universal Color
PACK

PPC Universal Color Pack is designed to tint solvent-borne polyvinyl chloride, polyurethane, epoxide, organic-silicon, pentaerythritol modified phtalic resin, nitrocellulose and other system.



Black | **Dark Gray** | **Medium Gray** | **Light Gray** | **Tan** | **White**

PPC

PARTNER BRANDS

Premium selection of specialized industry brands available through PPC. Access external high-quality products to complement your projects with our professional distribution network.







OTHER BRANDS
TROUGH PPC









T2 MCM
PREMERA

DESCRIPTION **Single component, spray down sol-gel based clear coating** designed to protect concrete, terrazzo, tile and existing coatings by creating a high strength, quartz mineral barrier.

Fusion Primer
PREMERA

DESCRIPTION **Single component, spray on sol-gel based fusion primer** that functions as a direct to substrate primer and as an intercoat adhesion primer.

Quick Seal
PREMERA

DESCRIPTION Single component, spray down, fast-drying acrylic sealer designed to **seal substrate pores and capillaries** before applying Premera T2 MCM.


Easy MVB
PREMERA

DESCRIPTION **A unique surface treatment for concrete** consisting of specialized reactive chemicals in a colloidal silica matrix.

OTHER BRANDS
TROUGH PPC

SCAN
TO LEARN MORE

ABOUT THIS PRODUCT

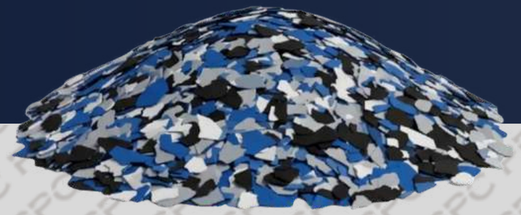







Flake
ORA

DESCRIPTION ORA Decorative Flake adds color, texture, and dimension to resinous flooring systems, transforming concrete into customized finishes. Available in various color blends, ORA broadcasts into compatible basecoats from light accents to full coverage. Ideal for garages, showrooms, retail, and commercial spaces, it pairs with clear topcoats for a seamless, easy-to-maintain floor.

Flake
TORGINOL

DESCRIPTION Flake Flooring systems are renowned for their superior strength, chemical resistance, and seamless finish. With a vast array of available blend options, there is a solution for any space.

Quartz
TORGINOL

DESCRIPTION The perfect blend of durability, slip resistance, and aesthetic appeal. Quartz™ Flooring is engineered to provide a seamless, non-porous surface that is easy to maintain and resistant to chemicals, stains, and abrasions. It's **durability makes it an ideal solution** for a wide range of industrial and commercial applications.

Clear Epoxy
JP RESIN

DESCRIPTION The JPResin New Level Flow Epoxy Kit is a **crystal-clear, high-strength floor coating system** engineered for demanding environments such as commercial.

JOIN OUR DISTRIBUTOR NETWORK

and offer high-performance coating systems trusted by contractors across the industry.

GET STARTED!



PREMIER PROTECTIVE COATINGS

CONTACT US

orders@premierprotectivecoatings.com
+1 (877) 738-6691